




Globally Proven
Construction Solutions

125 Sound & Crack Adhesive

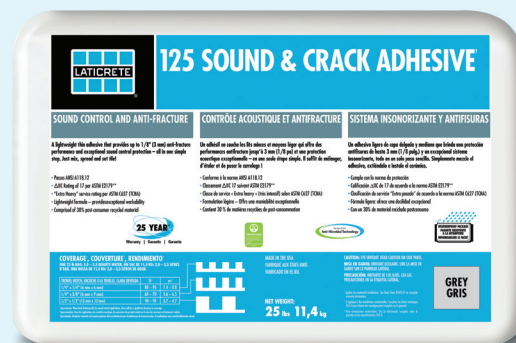

CERTIFIED
LOW VOC

FEATURES

- Anti-fracture and sound protection in one step
- Single component — just add water
- Lightweight
- 30% post consumer recycled content
- Reinforced with Kevlar®
United States Patent No.: 6784229 B2 (and other Patents)
- Significant sound attenuation

BENEFITS

- Install tile faster and reduce labour costs.
- Easy to mix, spread and use.
- 22.7 kg coverage in an 11.3 kg bag.
- Contributes to LEED.
- A stronger bond.
- Increase in Impact Isolation $\Delta L_w 13$.

Uses

- Interior use†
- Formulated as a superior crack prevention and sound isolation adhesive
- Prevents transmission of cracks from the approved substrates to the tile or stone finish when subjected to horizontal in plane movement cracks up to 3 mm under normal usage

Suitable Substrates

- Concrete
- Ceramic tile and stone
- Brick masonry
- Cement backer board
- Cement mortar beds
- Exterior glue plywood*
- Cement terrazzo
- Poured gypsum underlayments

Packaging

11.3 kg bag; 56 bags per pallet

Available Colour

Grey

Approximate Coverage Per Bag

6 mm x 6 mm notched trowel	7.4 – 8.8 m ²
6 mm x 9 mm notched trowel	5.6 – 6.5 m ²
12 mm x 12 mm notched trowel	3.7 – 4.2 m ²

For the latest information on the features and use of this product, consult the product Data Sheet on our website at www.laticrete.com.au



Snap for information.

* Consult cement backer board and plywood manufacturer for specific installation recommendations. † Can be used in external areas not subject to freeze/thaw.

LATICRETE Pty Ltd.
29 Telford Street, Virginia, QLD 4014 Australia • 1800 331 012 • www.laticrete.com.au

DS-1023-1116

©2016 LATICRETE Pty Ltd.
All trademarks shown are the intellectual properties of their respective owners.