




Globally Proven
Construction Solutions

PERMACOLOR® Grout

PERMACOLOR® Grout is a high performance grout that provides a grout joint that is dense, hard and will resist cracking.

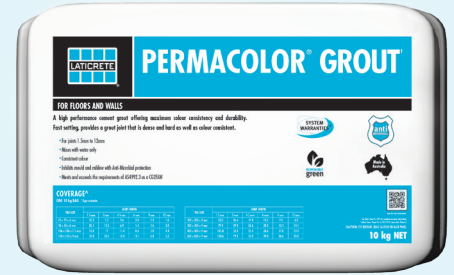

Product Data Sheet 1041



FEATURES

- Consistent colour
- Fast Setting
- 1 step – mix with water
- Stain-resistant
- Versatile
- Equipped with antimicrobial properties
- Strong and durable cement-based grout

BENEFITS

- No blotchiness, resists efflorescence (compared to other Portland cement-based grout).
- Faster to install and finish.
- Easy to install, no additive required.
- Easy to clean, highly stain-resistant for a cement-based grout.
- Covers a wide range of joint widths; 1.5 mm – 12 mm.
- Inhibits the growth of stain-causing mould and mildew growth in the grout joints.
- Resists cracking and powdering.

Uses

- Ceramic tile and stone applications
- Interior and exterior
- Floors and walls
- Swimming pools

Suitable Substrates

- Marble
- Porcelain tile
- Granite
- Quarry tile
- Ceramic tile
- Glass mosaic
- Stone

Packaging / Colours

- 5 kg bag; 4 bags per carton; 40 cartons per pallet. Available in top 12 colours.
 - 10 kg bag; 100 bags per pallet. Available in top 20 colours.
- (please refer to colour chart)

Approximate Coverage Per 10 kg Bag – m²

Tile Size	Joint Width				
	1.5 mm	3 mm	6 mm	9 mm	12 mm
25 x 25 x 6 mm	9.4	5.1	3.0	2.3	1.9
50 x 50 x 6 mm	18.1	9.4	5.1	3.7	3.0
100 x 100 x 8 mm	26.6	13.6	7.1	4.9	3.8
150 x 150 x 9 mm	35.2	17.8	9.2	6.3	4.9
200 x 200 x 9 mm	46.7	23.6	12.1	8.2	6.3
300 x 300 x 9 mm	69.8	35.2	17.8	12.1	9.2
325 x 325 x 9 mm	75.6	38.0	19.3	13.0	9.9
400 x 400 x 9 mm	92.9	46.7	23.6	15.9	12.1
450 x 450 x 9 mm	104.4	52.5	26.5	17.8	13.5
600 x 600 x 9 mm	139.0	69.3	35.2	23.6	17.8

For the latest information on the features and use of this product, consult the product Data Sheet on our website at www.laticrete.com.au

Certain types of stone and tile are more absorbent than others and will trap colour pigment during grouting. Prior to grouting, test for absorption of colour pigment. Porous tiles will need to be sealed prior to grouting, this includes polished porcelain. Care should be taken when using sanded grouts or soft faced tiles as scratching can occur.

Snap for information.

