




Globally Proven  
Construction Solutions

# EPOXY PIGMENTS

EPOXY PIGMENTS are designed to be used exclusively with VAPOR REDUCTION COATING Pigment Base. Available in 8 colors: Black, White, Light Grey, Medium Grey, Dark Grey, Tile Red, Sand Beige, and Dark Beige. Once ready for use, these concentrated epoxy pigments are dispersed directly into short-filled VAPOR REDUCTION COATING part B pigment base.

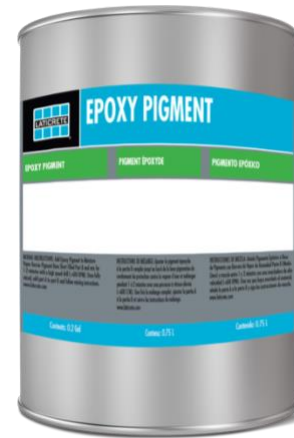

## FEATURES/BENEFITS

- Simplifies installation by eliminating pigmented base coat in a system
- Provides moisture vapor control
- Uniform consistent base color
- Easy to use on-site color dispersion system
- Low odor
- Low VOC

## USES

- Industrial floor coatings

## MANUFACTURER

LATICRETE EUROPE S.R.L .

Via Viazza 1° Tronco nr 19

41043 Formigine (MO) – Italy

Ph. +39 059557680

info@laticreteurope.com

**Suitable Substrates**

Concrete slabs

**Packaging**

- 1.9 L for 14.4 L short filled VAPOR REDUCTION COATING Pigment Base part B
- 0.75 L for 5.3 L short filled VAPOR REDUCTION COATING Pigment Base part B

**Approximate Coverage**

Refer to data sheet 056.0 Vapor Reduction Coating

**Shelf Life**

Three (3) years unopened. Store at 4°-24°C in a covered area (out of the sun). Maintain a consistent storage temperature prior to application. Material should be kept in a cool dry place prior to application. Do not allow to freeze.

**Limitations**

Refer to data sheet 056.0 **VAPOR REDUCTION COATING**

- Not for use over any other substrates other than concrete slabs cured for a minimum of 5 days at 21°C
- All existing expansion joints, cold joints and control joints must be brought up through the VAPOR REDUCTION COATING and the finish.
- Failure to honor movement joints will result in cracking and/or loss of bond.
- LATICRETE is not responsible for moisture vapor emission from any movement joints, existing cracks, new cracks that may develop or voids in the Vapor Reduction Coating in the concrete slab after the system has been installed.

**Cautions****FOR PROFESSIONAL USE ONLY**

- Thoroughly read all technical data sheets, application guidelines, warranty disclaimers and Safety Data Sheets (SDS) prior to use. Application guides depending on the dye system employed are available at [www.laticrete.eu](http://www.laticrete.eu)
- Polyaspartic aliphatic polyurea products contain chemical ingredients that are considered hazardous. Read the container label warning and SDS prior to use.
- Wear safety eye protection and gloves when applying. Contact with eyes may cause irritation. Flush eyes with water for 15 Minutes, if symptoms persist seek medical attention.

- Tape color transition lines firmly to reduce dye “bleed” under taped line.
- Material should be kept in a cool dry place prior to application
- Product is combustible. Keep away from open flames and apply in well ventilated area.
- Do not use alcohol at any point during application of the system.
- Surface temperature will become elevated when exposed to direct sunlight in warmer climates.

Mock-ups and field test areas are required in order to validate performance and appearance related characteristics (including but not limited to color, inherent surface variations, wear, anti-dusting, abrasion resistance, chemical resistance, stain resistance, coefficient of friction, etc.) to ensure system performance as specified for the intended use, and to determine approval of the decorative flooring system.

**INSTALLATION****Mixing**

Add EPOXY PIGMENT to VAPOR REDUCTION COATING Pigment Base Short Filled Part B and mix for 1-2 minutes with a high speed drill (>600 RPM). Assure mixture is fully uniform and that all ribbons of contrasting shade are completely eliminated. Once fully mixed, add part A to part B and follow mixing instructions. These can be found on data sheet 056.0 VAPOR REDUCTION COATING.

- Full unit VAPOR REDUCTION COATING Pigment Base is to be mixed with 1.9 L EPOXY PIGMENT.
- Mini unit VAPOR REDUCTION COATING Pigment Base is to be mixed with 0.75 L EPOXY PIGMENT.

**NOTE:** To help reduce fish eyes and pinholes apply a fine mist of water on top of the prepared concrete using a pump garden type sprayer and allow moisture to absorb just prior to applying Vapor Reduction Coating. Broom out excess water. Concrete should readily absorb water. Do not apply MVB there is standing water on top of the concrete. If water beads or does not absorb within 60 seconds additional surface prep is needed.

**AVAILABILITY AND COST**

**Availability**

LATICRETE® materials are available worldwide. For distributor information, please contact LATICRETE EUROPE S.r.l. Telephone +39 059557680. For on-line distributor information, visit [www.laticrete.eu](http://www.laticrete.eu)

**Cost**

Contact a LATICRETE® closer distributor to obtain complete information and cost.

**WARRANTY**

The supplier warrants that the product will not deteriorate under normal conditions and use. The warranty validity of one (1) year.

Contact Technical Support for further information

**MAINTENANCE**

LATICRETE® products are of high quality designed to achieve lasting installations and avoid maintenance, however performance and durability may depend on properly maintaining products, depending of the cleaning products used.

**TECHNICAL SERVICES****Technical assistance**

For information contact: +39 059557680

[info@laticreteurope.com](mailto:info@laticreteurope.com)

**Technical and safety literature**

To obtain technical and safety literature, please visit our website at [www.laticrete.eu](http://www.laticrete.eu)

**Warning**

The information and the instructions in the data sheet, although based on knowledge gained through years of applications, are indicative. LATICRETE® unable to directly control the installation conditions and modalities of application of products, do not assume any liability arising from their implementation. Those who want to use the LATICRETE® products must conduct adequate tests to determine the site specifications. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation method and site conditions.