


SPARTA-GUARD™

A solid color high performance polyaspartic floor coating designed to provide durable and sanitary flooring with minimal maintenance and rapid return to service.



- Airplane Hangers
- Shop Floors
- Warehouses
- Car Dealerships
- Manufacturing
- Parking Decks & garages
- Laboratories
- Retail

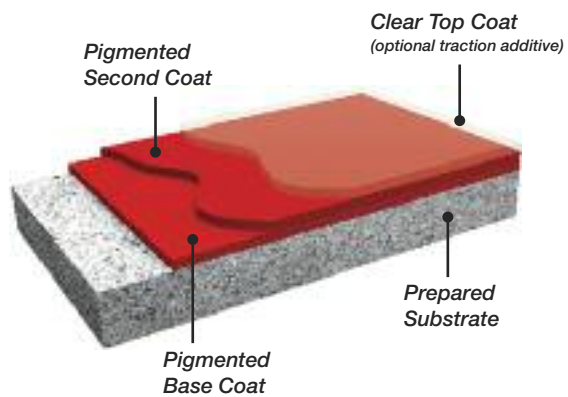

SPARTA-GUARD™

SYSTEM FEATURES & BENEFITS:

- 1-Day Installation
- All-Climate Application
- Next-Day Return to Service
- Superior Substrate Adhesion
- UV Stable
- High Abrasion & Chemical Resistance
- Varied Traction Available
- Green-Friendly Options

SYSTEM VARIATIONS	OVERALL THICKNESS	APPLICATIONS
SPARTA-GUARD™	9 mils DFT	Shop floors, industrial floors and other heavy-traffic applications
SPARTA-GUARD SL™	1/8"-1/4" (125-250 mils DFT)	Use where added thickness is required. Self-leveling properties offer ideal surface for aircraft hangars.
SPARTA-GUARD PURE™	20 mils DFT	Minimal Odor, VOC-Free. Interior applications.
SPARTA-GUARD PURE™ SL	1/8"-1/4" (125-250m mils DFT)	Minimal Odor, VOC-Free. Interior applications where added thickness is required. Self-leveling.



CURED SYSTEM PROPERTIES	SPARTA-GUARD™
Coefficient of Friction (ASTM C-1028)	dry: 0.83 wet: 0.98
Hardness (ASTM D 2240):	94
Abrasion Resistance (ASTM D-4060 mg loss):	22-28
Tensile Strength (ASTM D-638,D-2370 psi)	4500-5000
Substrate Adhesion (ASTM D-4541, psi)	400-500+, concrete fracture
Flammability: (ASTM D-635)	self extinguishing

For Additional Information call: 866-966-1DAY(1329) Or email: contact@hpspartacote.com

HP Spartacote Inc.

810 Brickyard Circle #1 | Golden, CO 80403 | www.hpspartacote.com