


SPARTA-SEAL™

An economical and functional clear polyaspartic sealer system for concrete. The application provides a wet concrete look, enhancing the colors of the underlying concrete substrate.



- Garages
- Warehouses
- Distribution Centers
- Manufacturing Facilities
- Event Centers
- Walk-Ways & Concourses

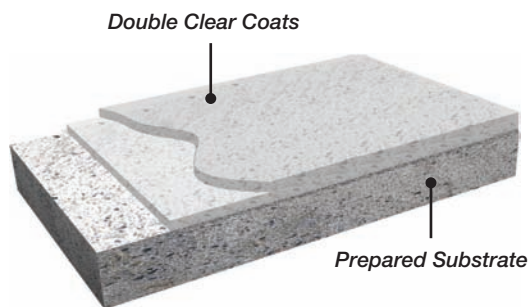


SPARTA-SEAL™

SYSTEM FEATURES & BENEFITS:

- Provides a "Wet Concrete" look, enhances underlying aggregate colors
- Superior durability over acrylic or epoxy based concrete sealers
- UV stable
- Optimal substrate adhesion
- Gloss, Satin or Matte Finish
- Available in a standard as well as minimal odor/VOC-Free version
- Stain resistant
- May incorporate traction additives for optimal slip resistance.

SYSTEM VARIATIONS	OVERALL THICKNESS	APPLICATIONS
SPARTA-SEAL™	6 mils DFT	Decorative concrete requiring above average chemical and abrasion resistance.
SPARTA-SEAL PURE™	12 mils DFT	Green-friendly with minimal odor and 0-VOCs. Ideal for indoor applications.

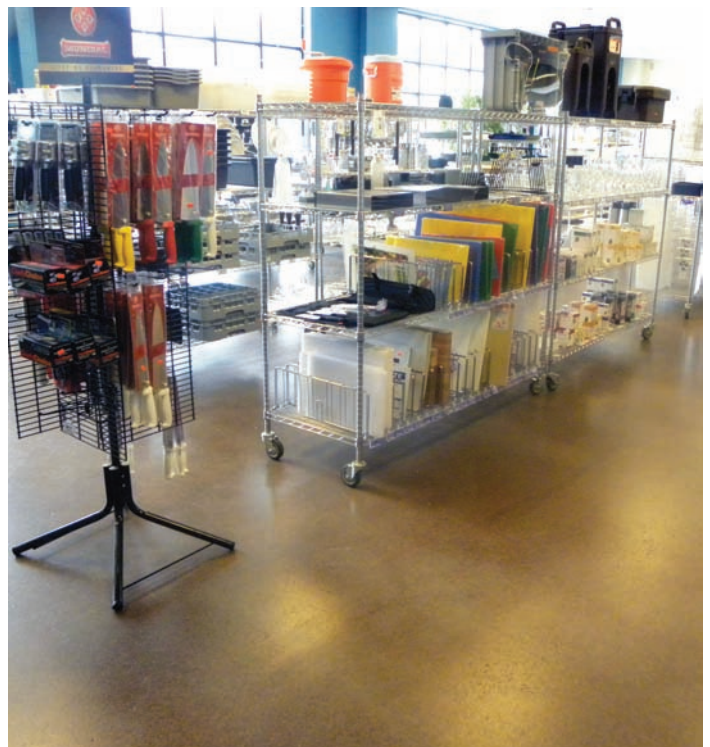

CURED SYSTEM PROPERTIES	SPARTA-SEAL™
Coefficient of Friction (ASTM C-1028)	dry: 0.98 wet: 0.83
Hardness (ASTM D 2240):	94
Abrasion Resistance (ASTM D-4060 mg loss):	22-28
Tensile Strength (ASTM D-638,D-2370 psi)	4500-5000
Substrate Adhesion (ASTM D-4541, psi)	400-500+, concrete fracture
Flammability: (ASTM D-635)	self extinguishing

For Additional Information call: 866-966-1DAY(1329) Or email: contact@hpspartacote.com

HP Spartacote® Inc.

810 Brickyard Circle #1 | Golden, CO 80403 | www.hpspartacote.com