



HYDRO BAN® Preformed Niche

DS-033.0-0414

**Globally Proven
Construction Solutions**



1. PRODUCT NAME

HYDRO BAN® Preformed Niche

2. MANUFACTURER

LATICRETE International, Inc.
1 LATICRETE Park North
Bethany, CT 06524-3423 USA

Telephone: +1.203.393.0010, ext. 235
Toll Free: 1.800.243.4788, ext. 235
Fax: +1.203.393.1684
Internet: www.laticrete.com

3. PRODUCT DESCRIPTION

HYDRO BAN Preformed Niche is a component of the expanded HYDRO BAN line of waterproofing products that allow for high quality rapid shower installations. HYDRO BAN Preformed Niche is constructed of lightweight high-density expanded polystyrene with a waterproof finish and is ready to tile.

Materials: Saw or utility knife for cutting substrate layer out of niche location. HYDRO BAN Adhesive & Sealant or HYDRO BAN and Waterproofing Anti-Fracture Fabric.

Advantages

- Lightweight and durable. Easy to transport, handle and adjust during installation
- Factory installed, code approved waterproofing meets ANSI A118.10 requirements
- Ready to tile
- Multiple design options and sizes available adding utility and value to the shower installation
- Component of LATICRETE® Lifetime Tile & Stone System Warranty[^] single source responsibility
- Works in conjunction tile and stone installation materials

Uses

- Interior and exterior use
- Shower stalls and tub surrounds
- Industrial, commercial and residential
- Decorative applications in walls

Suitable Substrates

- Wood or metal studded walls

Packaging

HYDRO BAN Preformed Niche models:

- 12"x12" (30 cm x 30 cm) Square
- 12" x 12" & 12" x 6" (30 cm x 30 cm & 30 cm x 15 cm) Wide Combo
- 8" x 12" & 8" x 6" (20 cm x 30 cm & 20 cm x 15 cm) Narrow Combo
- 12" x 20" (30 cm x 51 cm) Mega
- 8" x 8" (20 cm x 20 cm) Soap

Limitations

- Adhesives/mastics, mortars and grouts for ceramic tile, pavers, brick and stone are not replacements for waterproofing membranes. When a waterproofing membrane is required, use HYDRO BAN.
- Do not expose to rubber solvents or ketones.
- Must be covered with ceramic tile, stone, finish.

Note: Surfaces must be structurally sound, stable and rigid enough to support ceramic/stone tile, thin brick and similar finishes.

Cautions

Consult MSDS for more safety information.

- During cold weather, protect finished work until fully cured.
- For white and light-colored marbles, use a white Latex Portland Cement Thin Set Mortar.
- For green and moisture sensitive marble, agglomerates and resin backed tile and stone use LATAPOXY® 300 Adhesive (refer to DS 633.0).
- If the waterproof coating on the HYDRO BAN Preformed Niche is punctured during installation or from job site construction activity re-coat the punctured area and 2" (50 mm) around the area with two coats of HYDRO BAN, follow DS 663.0 and DS 663.5 for full instructions.

4. TECHNICAL DATA

Waterproofing membrane meets ANSI A118.10.

5. INSTALLATION

Installation to Existing 2" x 4" (50mm x 100mm) Wall

(Two Layers of Wall Board)

See Detail ES-W244N Double Panel

- Determine desired height of niche and draw level line on substrate layer.
- Place HYDRO BAN® Preformed Niche with the bottom flange of the niche centered on the level line.
- Trace exterior flanges.
- Cut along line and remove top substrate layer. If accessible, install 2" x 4" (50mm x 100mm) horizontal cross bracing to support HYDRO BAN Preformed Niche. See Dimensional Drawings for specific niche sizes to determine cross bracing location.
- Use HYDRO BAN Adhesive & Sealant to adhere HYDRO BAN Preformed Niche to studs.
- Seal joints between HYDRO BAN Preformed Niche and backer board using HYDRO BAN, if the seam is greater than 1/8" (3mm) then Waterproofing/Anti-fracture Fabric will need to be used with the HYDRO BAN. Alternatively apply fiberglass tape to seam between HYDRO BAN Preformed Niche and backer board and cover with polymer fortified thin-set in the same manner as seams in backer board.
- Install tile according to Tile Council of North America (TCNA) guidelines and LATICRETE® installation instructions using 254 Platinum or 255 MULTIMAX™.

INSTALLATION IN NEW CONSTRUCTION

See ES-W244N Single Panel

- Determine desired height of niche and mark 2" x 4" (50mm x 100mm) accordingly.
- Install horizontal cross bracing to support HYDRO BAN Preformed Niche. See Dimensional Drawings for specific niche sizes to determine cross bracing location.
- Use HYDRO BAN Adhesive & Sealant to adhere HYDRO BAN Preformed Niche to studs.
- Next, install 1/2" (12mm) backer board on all walls and flush to niche 1/2" (12mm) flanges.
- Seal joints between HYDRO BAN Preformed Niche and backer board using HYDRO BAN, if the seam is greater than 1/8" (3mm) then Water proofing/Anti-fracture Fabric will need to be used with the HYDRO BAN. Alternatively apply fiberglass tape to seam between HYDRO BAN Preformed Niche and backer board and cover with polymer fortified thin-set in the same manner as seams in backer board.
- Install tile according to TCNA guidelines and LATICRETE installation instructions.

6. AVAILABILITY AND COST

Availability

LATICRETE and LATAPOXY® materials are available worldwide.

For Distributor Information, Call:

Toll Free: 1.800.243.4788

Telephone: +1.203.393.0010

For on-line Distributor information, visit LATICRETE at www.laticrete.com.

Cost

Contact a LATICRETE Distributor in your area.

7. WARRANTY

See 10. FILING SYSTEM:

DS 230.13: LATICRETE Product Warranty (United States and Canada)

A component of:

DS 230.10APD: LATICRETE 10 Year Tile & Stone System Warranty (United States and Canada)

DS 025.0APD: LATICRETE 25 Year Tile & Stone System Warranty (United States and Canada)

DS 230.99: LATICRETE Lifetime Tile & Stone System Warranty (United States and Canada)

8. MAINTENANCE

LATICRETE® and LATAPOXY® grouts require routine cleaning with a neutral pH soap and water. All other LATICRETE and LATAPOXY materials require no maintenance but installation performance and durability may depend on properly maintaining products supplied by other manufacturers.

9. TECHNICAL SERVICES

Technical Assistance

Information is available by calling the LATICRETE Technical Service Hotline:

Toll Free: 1.800.243.4788, ext. 235

Telephone: +1.203.393.0010, ext. 235

Fax: +1.203.393.1948

Technical and Safety Literature

To acquire technical and safety literature, please visit our website at www.laticrete.com.

10. FILING SYSTEM

Additional product information is available on our website at www.laticrete.com. The following is a list of related documents:

DS 230.13: LATICRETE Product Warranty (United States and Canada)

DS 230.10APD: LATICRETE 10 Year Tile & Stone System Warranty (United States and Canada)

DS 025.0APD: LATICRETE 25 Year Tile & Stone System Warranty (United States and Canada)

DS 230.99: LATICRETE Lifetime Tile & Stone System Warranty (United States and Canada)

DS 663.0: HYDRO BAN

DS 237.0: Waterproofing/Anti-fracture Fabric


DS 108.0: HYDRO BAN Adhesive and Sealant

DS 080.0: 4-XLT

DS 677.0: 254 Platinum


DS 255.0: 255 MULTIMAX[^]

DS 633.0: LATAPOXY 300 Adhesive

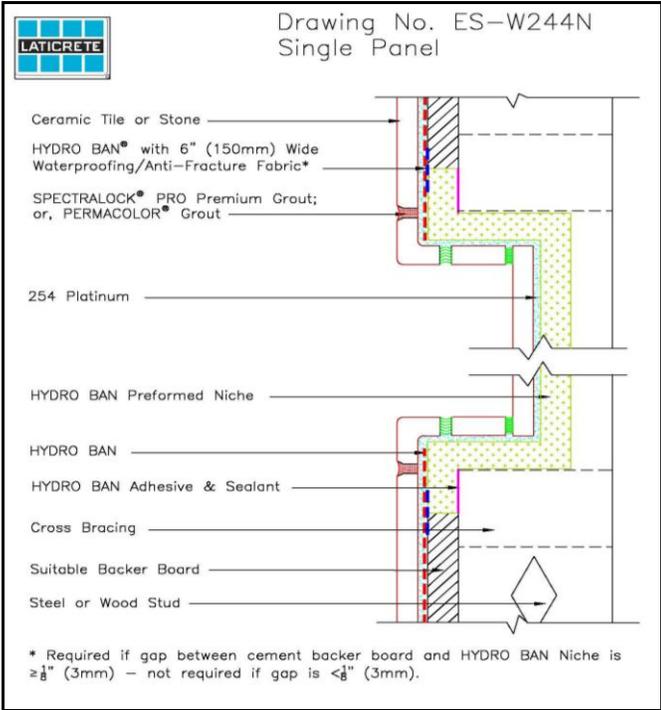


DIMENSIONAL DRAWINGS



HYDRO BAN® Preformed Niche 12" x 12" Square

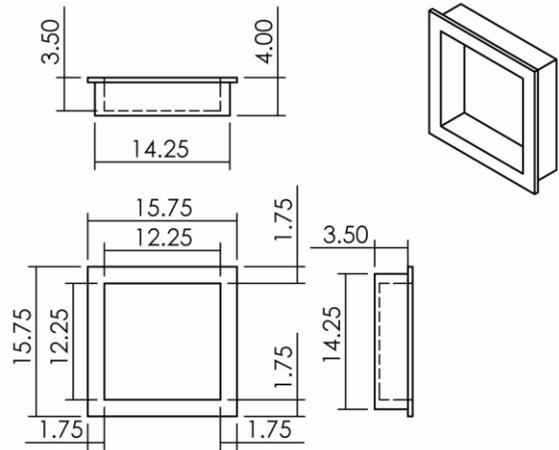


HYDRO BAN Preformed Niche 12" x 12" and 12"x6": Combo

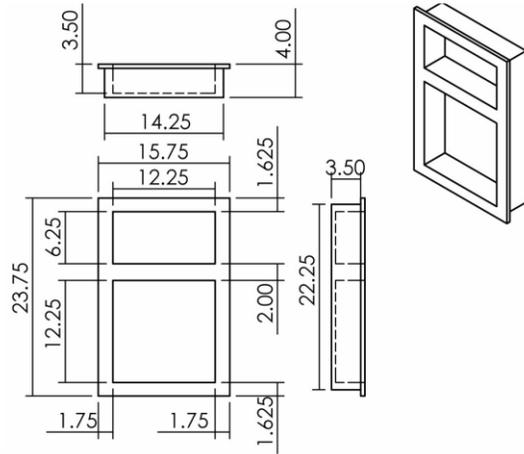


HYDRO BAN Preformed Niche 8" x 12" and 8" x 6" Narrow Combo

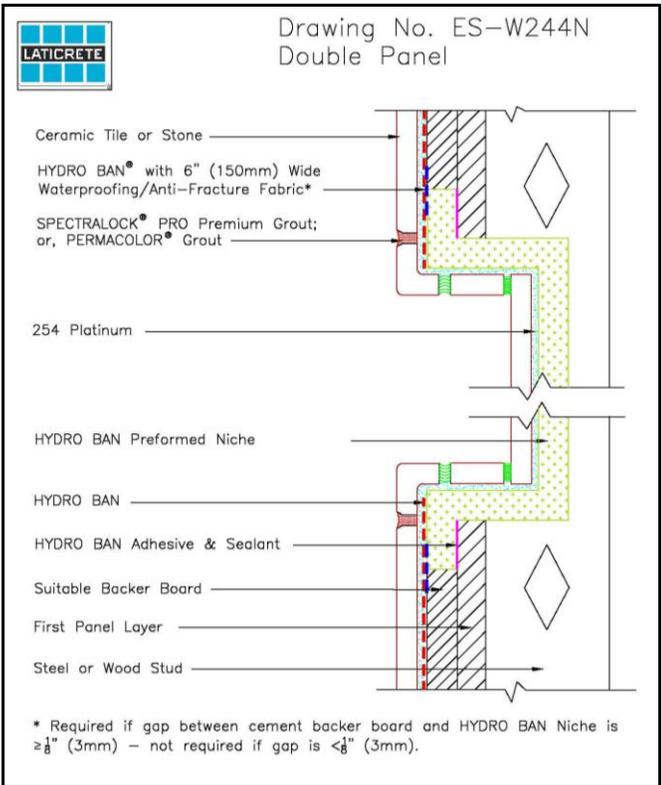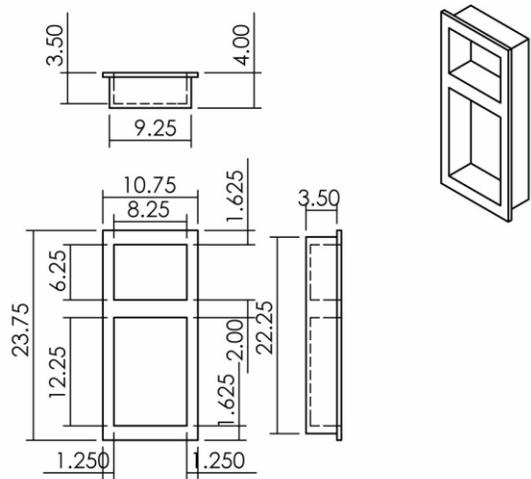

HYDRO BAN® Preformed Niche 12" x 20" Mega

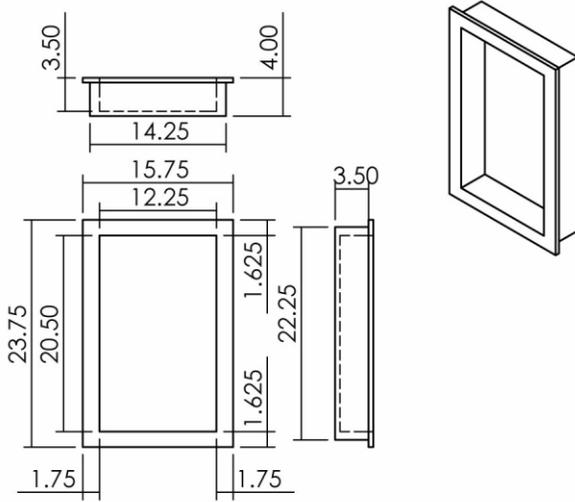

HYDRO BAN Preformed Niche 8" x 8" Soap

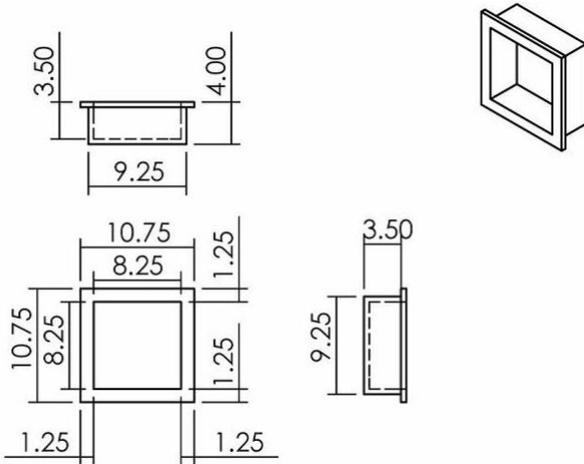

^ United States Invention Patent No.:6784229 (and other Patents)

LATICRETE International, Inc.
 One LATICRETE Park North, Bethany, CT 06524-3423 USA • 1.800.243.4788 • +1.203.393.0010 • www.laticrete.com
 ©2014 LATICRETE International, Inc.
 All trademarks shown are the intellectual properties of their respective owners.