




Globally Proven  
Construction Solutions

# Hydro Stick On Waterproofing Membrane

Hydro Stick On Waterproofing Membrane is a high performance, cold applied, flexible, preformed waterproof membrane combining a special high performance cross-laminated, HDPE carrier film with a unique self-adhesive rubber bitumen compound which fully bonds onto substrate to prevent lateral water migration. Hydro Stick On Waterproofing Membrane is designed to provide flexibility to perform over a wide range of installation technique, weather, substrates and conditions. It is suitable to be used for sub-structures and flat deck application.

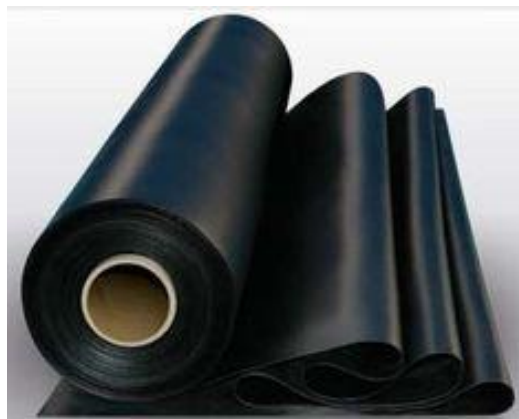

## FEATURES/BENEFITS

- Cross laminated provides high dimensional stability, puncture & tear strength
- Unique self-adhering technology ensuring continuous seal
- Factory controlled thickness
- Chemical resistance providing effective external protection against aggressive elements
- Accommodate settlement & shrinkage movement

## USES

- Basement Sub Structure
- Podium Decks
- R.C. Flat Roof

## MANUFACTURER/DISTRIBUTED BY

LATICRETE South East Asia Pte Ltd (Level 2, A3)  
No. 38 Sungei Kadut, Street 2, Singapore 729245  
Telephone: +65 6515 3028 Fax: +65 6515 3037  
Internet: [se.laticrete.com](http://se.laticrete.com)

## STANDARDS/CERTIFICATIONS

- ASTM D412
- ASTM D903
- DIN 16726
- ASTM E 96

**Packaging**

Hydro Stick On Waterproofing Membrane comes in in 20m x 1.0m x 1.5mm per roll.

**TECHNICAL DATA****Performance Properties**

Test	Test Method	Results
Tensile Strength	ASTM D412	> 4 N/mm <sup>2</sup>
Elongation	ASTM D412	> 300%
Peel Adhesion	ASTM D903	> 2,000 N/mm
Hydrostatic Resistance @ 6 bars	DIN 16726	Pass
Water Vapour Transmission	ASTM E96	<0.05g/m <sup>2</sup> /hr

**INSTALLATION****Substrate Preparation**

Substrate must be and free from sharp protrusions, and any hollows to be filled with non-shrink mortar. Horizontal and vertical faces must be smooth, regular, dry and free from nails. Prime the horizontal and vertical surfaces with one coat of Bituminous Primer applied by brush or roller at a rate of 8-10 sq m per litre depending on the porosity of the surface, and allow to be touch dry before the application of Hydro Stick On Waterproofing Membrane.

**Application**

Hydro Stick On Waterproofing Membrane should be laid by peeling back the protective release liner and applying the self-adhesive face on to the surface to ensure good initial bond. Adjacent rolls are aligned and overlapped 50mm minimum at side and 50mm at ends, and the overlaps well rolled with a firm pressure using a roller to ensure complete adhesion and continuity between the layers. Always apply Hydro Stick On Waterproofing Membrane directly to primed or conditioned structural substrates. Insulation, if used, must be applied over the membrane. Do not apply Hydro Stick On Waterproofing Membrane over lightweight insulating concrete.

**Exposure and Protection**

Following the application and inspection, care should be taken to prevent damage by following trades. As soon as practicable after the application, Hydro Stick On Waterproofing Membrane should be protected from exposure to the weather and physical damage using protection boards, insulation or drainage sheet. Any punctured or damaged areas should be cleaned and patched using Hydro Stick On Waterproofing Membrane with minimum 50mm laps all around.

**AVAILABILITY AND COST****Availability**

LATICRETE and LATAPOXY materials are available worldwide. For distributor information, call:

Telephone: (65) 6515-3028

Fax: (65) 6515-3037

For on-line distributor information, visit LATICRETE at [se.laticrete.com](http://se.laticrete.com)

**Cost**

Contact a LATICRETE Distributor in your area.

**WARRANTY**

LATICRETE South East Asia Pte Ltd warrants that Hydro Stick On Waterproofing Membrane is free from manufacturing defects and will not break down, deteriorate or disintegrate under normal usage for a period of one (1) year from date of purchase subject to the terms and conditions stated in Data Sheet.

**TECHNICAL SERVICES/ CONTACT****Technical Assistance**

Information is available by calling:

LATICRETE South East Asia Pte Ltd  
(Level 2, A3)

No. 38 Sungei Kadut, Street 2,  
Singapore 729245

Telephone: (65) 6515-3028

Fax: (65) 6515-3037

Email: [enquiry@laticrete.com.sg](mailto:enquiry@laticrete.com.sg)

**Technical and safety literature**

To acquire technical and safety literature, please visit our website at [se.laticrete.com](http://se.laticrete.com)