




Globally Proven  
Construction Solutions

# SPECTRALOCK® PRO Grout\*

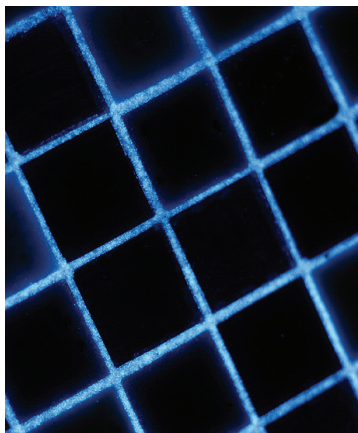

CERTIFIED  
**LOW VOC**

## FEATURES

Meets ANSI A118.3 properties

Ideal for floor and wall applications

Vibrant, consistent colour

Ease of maintenance

Unique design capabilities

Fights mould and mildew

Greenguard certified for better indoor air quality

## BENEFITS

Improved physical properties make installations with SPECTRALOCK® PRO Grout stronger and more durable, with excellent stain and chemical resistance.

One grout does it all; SPECTRALOCK PRO Grout does not require an additive for wall or narrow joint installations.

Perfect colour uniformity; no blotchiness or shading, will not discolour from neutral household cleaners.

SPECTRALOCK PRO Grout never needs sealing; helps keep tile installation looking brand new for years.

Optional DAZZLE™ component is a design element that compliments tile and stone; metallic accents, mother of pearl and glow-in-the-dark bring grout to the forefront.

Inhibits the growth of stain-causing mould and mildew in the grout joint with antimicrobial product protection.

Contributes to LEED Certification and low VOCs.

## Uses

- Interior and exterior on floors and walls
- Swimming pools, fountains and permanent wet areas
- Ideal for re-grouting applications
- Residential and commercial, ceramic tile, glass tile and stone applications

## Packaging

Mini Carton Yield: 4 x 0.7 litre	A: 4 x 0.14 kg
	B: 4 x 0.14 kg
	C: 4 kg
Full Unit Yield: 3.0 litres	A: 0.6 kg
	B: 0.6 kg
	C: 4 kg
Commercial Unit Yield: 12.0 litres	A: 4 x 0.6 kg
	B: 4 x 0.6 kg
	C: 4 x 4 kg

## Available Colours

40 Lifestyle Colours

(Refer to LATICRETE Grout Colour Chart for complete colour selection information)

## Approximate Coverage per Full Unit† - m<sup>2</sup>

Tile Size (mm)	Grout Joint Size (mm)					
	1.5 mm	3 mm	4.5 mm	6 mm	9 mm	12 mm
25 x 25 x 6	4.5	2.4	1.8	1.4	1.1	0.9
50 x 50 x 6	8.6	4.5	3.1	2.4	1.8	1.4
106 x 106 x 7.5	14.2	7.3	4.9	3.8	2.6	2.0
100 x 200 x 12	8.4	4.3	2.9	2.2	1.6	1.2
150 x 150 x 9	16.7	8.5	5.7	4.4	3.0	2.3
200 x 200 x 9	22.2	11.2	7.6	5.7	3.9	3.0
300 x 300 x 9	33.1	16.7	11.2	8.5	5.7	4.4
325 x 325 x 9	35.9	18.2	12.1	9.2	6.2	4.7
400 x 400 x 9	44.1	22.2	14.9	11.2	7.6	5.7
450 x 450 x 9	49.6	24.9	16.7	12.6	8.5	6.4
600 x 600 x 9	66.0	33.1	22.2	16.7	11.2	8.5

For the latest information on the features and use of this product, consult the product Data Sheet on our website at [www.laticrete.com.au](http://www.laticrete.com.au)

\* For more coverage information and a full grout coverage calculator, visit [www.laticrete.com.au](http://www.laticrete.com.au) \* United States Invention Patent No.: 6881768 (and other Patents).

Snap for information.



LATICRETE Pty Ltd.  
29 Telford Street, Virginia, QLD 4014 Australia • 1800 331 012 • [www.laticrete.com.au](http://www.laticrete.com.au)  
DS-1018-1116

©2016 LATICRETE Pty Ltd.  
All trademarks shown are the intellectual properties of their respective owners.