




STONETECH® Impregnator® Sealer

STONETECH Impregnator Pro is a solvent based sealer which preserves the natural look of stone surfaces.

Globally Proven
Construction Solutions

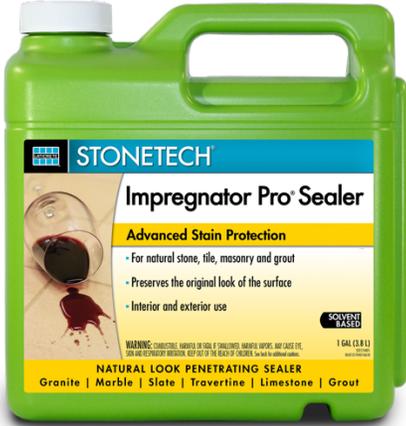

FEATURES/BENEFITS

- Heavy duty protection against most stains
- Preserves natural look of stone
- Solvent-based formula
- Interior and exterior use

MANUFACTURER

LATICRETE Middle East LLC.
 P.O. Box. 86028, Ras Al Khaimah
 United Arab Emirates
 Toll Free (with in UAE) 800 5632
 Telephone: + 971 7 244 6396
 Fax: + 971 7 244 5915
www.laticrete.me

USES

- Interior and Exterior**
- Countertops
 - Backsplashes
 - Floors
 - Walls

RECOMMENDED SURFACES

- Natural stone such as:
- Granite
 - Limestone
 - Slate
 - Bluestone
 - Travertine
 - Sandstone

Packaging

- Gallon (3.8 L), 4 units per case
- 20 L Pail, 36 pails per pallet
- 1 ℓ Bottle ,10 Bottles per case

Approximate Coverage*

Up to 93m² / 1 U.S. gal. (3,8 L)
depending on porosity of stone.

* Coverage will vary depending on density, porosity, texture, surface absorption, time that solution is left on surface, application method and severity of the problem.

Expected Wear:

- Up to 5 years on interior surfaces
- Up to 3 years on exterior surfaces
For best results, reapply annually.

Shelf Life

Factory sealed containers of this product are guaranteed to be of first quality for two (2) years if stored at temperatures >50°F (10°C) and

VOC Content: 748 g/L

Cautions

Consult SDS for more safety information.

- Inhalation: Move into fresh air and keep at rest. If breathing stops, provide artificial respiration. Get medical attention if any discomfort continues.
- Skin contact: Flush thoroughly with water for at least 15 minutes. Wash skin with soap and water. Get medical attention if irritation develops and persists.
- Eye contact: Flush thoroughly with water for at least 15 minutes. Remove contact lenses, if present and easy to do. Get medical attention immediately. May cause eye irritation.
- Ingestion: Immediately rinse mouth and drink plenty of water. Keep person under observation. If person becomes uncomfortable take to hospital along with these instructions. Get medical attention if symptoms occur.
- DISPOSAL INFORMATION: For disposal guidance for unused product, contact a household hazardous waste program or your local or state government environmental control agency.

Storage and Handling Instructions

COMBUSTIBLE. HARMFUL OR FATAL IF SWALLOWED. Do not ingest. HARMFUL VAPORS. Avoid prolonged exposure to vapors. Use only in a well-ventilated area. For spray application, use a pump- up garden sprayer. DO NOT USE A POWER SPRAYER. Use a respirator if unsure that work area is well-ventilated. A NIOSH-approved respirator with a combination HEPA/organic vapor cartridge is recommended. Follow respirator manufacturer's instructions for use. MAY CAUSE EYE, SKIN AND RESPIRATORY IRRITATION. Avoid contact with eyes and skin. Wear solvent- resistant gloves such as nitrile gloves. KEEP OUT OF THE REACH OF CHILDREN. Do not store above 100 °F (38 °C). Do not mix with other chemicals. Do not release to natural waterways.

TECHNICAL DATA**Physical Properties**

Form	Liquid
Color	Colorless
Odor	Mild
Specific gravity	0.85 (approx.)
Flash Point	> 40° C

Working Properties

Full Cure	24 – 72 hours
Surface Use	6 – 8 Hours

Specifications subject to change without notification. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation methods and site conditions.

INSTALLATION**Surface Preparation**

Read entire label before using. Use only as directed. Always test in a small inconspicuous area with a 24-hour cure time to determine ease of application and desired results. Allow new grout installations to cure for a minimum of 72 hours prior to applying sealer. Make sure surface is clean, dry and free of waxes and coatings. Surface temperature should be between 50°F and 80°F (10°C and 27°C). Keep children and pets out of the area until surface use resumes or treated surface is dry.

Directions

1. Ensure area is well-ventilated during application and until the surface is dry. Use a respirator if unsure that area is well-ventilated. A NIOSH-approved respirator with a combination HEPA/organic vapor cartridge is recommended. Follow respirator manufacturer's instructions for use.
2. Mask any surfaces not intended to be treated.
3. Liberally apply an even coat of STONETECH® Impregnator Pro® Sealer using a paint pad, roller, brush or pump-up garden sprayer. **DO NOT USE A POWER SPRAYER.** See method of application for more information. Do not thin before using.
4. Allow sealer to penetrate surface for 15–30 minutes; denser stone may require more time for sealer to penetrate. During this time, distribute excess sealer over entire area to ensure even penetration. **DO NOT ALLOW EXCESS STONETECH Impregnator Pro TO DRY ON SURFACE.**
5. Thoroughly wipe entire surface with dry cloth to remove excess STONETECH Impregnator Pro Sealer from surface.
6. A second coat may be needed for more porous surfaces and should be applied one hour after initial application, as directed in steps 3 through 5.
7. If excess sealer was not completely wiped off and a residue appears, wipe entire surface with a towel dampened with sealer. Use a white nylon scrubbing pad to loosen residue and follow with white absorbent towel to remove.
8. Full cure is achieved after 24–72 hours. Surface use may begin in 6–8 hours. If use of the surface must resume sooner, cover the treated surface with red rosin paper to protect it until full cure is achieved.
9. Rags and equipment that are wet with product may be combustible. Clean up promptly after job is complete. Clean equipment with mineral spirits and allow to dry in a well-ventilated area. Allow rags to dry in a well-ventilated area out of the reach of children and pets. When dry, dispose of in accordance with local waste disposal regulations.

Method of Application

DO NOT USE A POWER SPRAYER.

Power sprayers increase exposure hazard. Power sprayers also create a significant amount of overspray resulting in wasted product and the need for additional clean-up. A pump-up garden sprayer will reduce the potential for overexposure to vapors and produce better

results. For small jobs, use a paint pad, roller or brush. Trigger spray bottles are not recommended. Trigger sprayers create overspray and may not give a uniform application. Better results will be obtained using a pad, roller or brush. For larger jobs, use a pump-up garden sprayer available at your local garden center, hardware store, or home improvement center.

Cleaning

Rags and equipment that are wet with product may be combustible. Clean up promptly after job is complete. Clean equipment with mineral spirits and allow to dry in a well-ventilated area. Allow rags to dry in a well-ventilated area out of the reach of children and pets. When dry, dispose of in accordance with local waste disposal regulations.

AVAILABILITY AND COST

Availability

LATICRETE® materials are available worldwide.

For distributor information,

please contact us by email at: enquiry@laticrete.me or, visit www.laticrete.me

Cost

Contact a LATICRETE® closer distributor to obtain complete information and cost.

WARRANTY

The supplier warrants this product will not deteriorate under normal conditions and use, the warranty validity of one (1) year. The product subject to the terms and conditions stated in the LATICRETE® product warranty. Please consult our technical support for further information.

MAINTENANCE

Highly alkaline, acidic, ammoniated, or abrasive cleaners are not necessary for daily maintenance and may also degrade the STONETEC® sealer used, adversely affecting stain resistance. Tile and stone routine cleaning with a neutral pH cleaner such as STONETECH Stone & Tile Cleaner is recommended. For tough or difficult to remove soil use STONETECH KlenzAll™ Cleaner, a nylon scrubbing pad or a long handled stiff bristle brush. Please note: Prior to using any cleaning material on a tile, stone, etc. installation, test a discrete area or scrap piece of tile to insure desired results. For additional information, please refer to the TDS 262 Stone and Tile Care Guide.

TECHNICAL SERVICES

Technical assistance

For information contact us by email at:

enquiry@laticrete.me

Technical and safety literature

To obtain technical and safety literature, please visit our website at: www.laticrete.me

Warning: The information and the instructions in the data sheet, although based on knowledge gained through years of applications, are indicative. LATICRETE® unable to directly control the installation conditions and modalities of application of products, do not assume any liability arising from their implementation. Those who want to use the LATICRETE® products must conduct adequate tests to determine the site specifications. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation method and site conditions.
