

HYDRO BAN® Drain Grate

DS-069.0-0314

Globally Proven Construction Solutions







1. PRODUCT NAME

HYDRO BAN® Drain Grate

2. MANUFACTURER

LATICRETE International, Inc. 1 LATICRETE Park North Bethany, CT 06524-3423 USA

Telephone: +1.203.393.0010, ext. 235
Toll Free: 1.800.243.4788, ext. 235
Fax: +1.203.393.1684
www.laticrete.com

3. PRODUCT DESCRIPTION

HYDRO BAN Drain Grates are low profile floor drains specifically designed for use with the HYDRO BAN Pre-Sloped Shower Pan. The HYDRO BAN Drain Grate can also be used in other areas requiring standard drain grate installations (i.e. with standard clamping ring drains). HYDRO BAN Drain Grate and the HYDRO BAN Pre-Sloped Shower Pan are components of the expanded HYDRO BAN line of products that allow for high quality rapid shower installations. The HYDRO BAN Pre-Sloped Shower Pan is constructed of lightweight high-density expanded polystyrene and comes with a factory installed drain/waste line connection; it is 100% waterproof, and ready-to-tile.

Materials: LATICRETE® polymer fortified thin-set for installing tile and the appropriate size notched trowel.

Advantages

- Available in multiple finishes to match your other plumbing fixtures
- Code approval per ASME A 112.18-2 / CSA B125.2.05 (US and Canada)
- Component of LATICRETE Lifetime Tile & Stone System Warranty*. Single source responsibility
- Works in conjunction with HYDRO BAN Pre-Sloped Shower Pan and other clamping ring style drains

Uses

- Interior use only
- Industrial, commercial and residential bathrooms where a HYDRO BAN Pre-Sloped Shower is installed
- Stalled gang showers
- Pet showers

Suitable Substrates

- HYDRO BAN Pre-Sloped Shower Pans
- Clamping ring style drains

Packaging HYDRO BAN Drain Grate One drain grate per package

Finishes: Brushed Stainless Steel, Polished Stainless Steel, Oil Rubbed Bronze

Limitations

 Adhesives/mastics, mortars and grouts for ceramic tile, pavers, brick and stone are not replacements for waterproofing membranes. When a waterproofing membrane is required, use HYDRO BAN.

Note: Surfaces must be structurally sound, stable and rigid enough to support ceramic/stone tile and similar finishes. Substrate deflection under all live, dead and impact loads, including concentrated loads, must not exceed L/360 for thin bed ceramic tile installations or L/480 for thin bed stone installations.

Cautions

Consult MSDS for more safety information.

- During cold weather, protect finished work from traffic until fully cured.
- For white and light-colored marbles, use a white Latex Portland Cement Thin Set Mortar.
- For green and moisture sensitive marble, agglomerates and resin backed tile and stone use LATAPOXY® 300 Adhesive (refer to Data Sheet 633.0).
- If the waterproof coating on the HYDRO BAN Pre-Sloped Shower Pan is damaged during installation or from job site construction activity re-coat the damaged area and 2" (50 mm) around the area with two coats of HYDRO BAN, follow DS 663.0 or DS 663.5 for full instructions.
- Use care not to damage surface of HYDRO BAN Drain Grate prior to installation of tile or stone finishes. Cover with protection board to protect from foot traffic and other trades.

4. TECHNICAL DATA

Code approval per ASME A 112.18-2 / CSA B125.2.05 (US and Canada)

IAPMO Evaluation Report 0273

Evaluation scope compliance with the following codes

- 2012 Edition Uniform Plumbing Code
- 2012 Edition International Building Code
- 2012 Edition International Plumbing Code
- 2012 Edition International Residential Code

^{*} See DS 230.99 for complete warranty information.

5. INSTALLATION

- HYDRO BAN® Drain Grates are low profile floor drains specifically designed for use with the HYDRO BAN Pre-Sloped Shower Pans.
- Follow DS 031.0 for the installation of the HYDRO BAN Pre-Sloped Shower Pan.
- Once the HYDRO BAN Pre-Sloped Shower Pan installation has been completed and then waterproofing is completed with HYDRO BAN, the HYDRO BAN Drain Grate can then be installed.
- Start by threading on the HYDRO BAN Drain Grate to the HYDRO BAN Pre-Sloped Shower Pan female pipe threaded fitting.
- Pack the divot for drain grate adjustment with a thin layer of pea gravel, cover with thin-set when installing tile.
- Screw the drain grate down so it will be 1/16" (2 mm) below the final tile height with thin-set.
- Install tile according to industry guidelines and LATICRETE installation instructions using 254 Platinum.

6. AVAILABILITY AND COST

Availability

LATICRETE materials are available worldwide.

For Distributor Information, Call:

Toll Free: 1.800.243.4788 Telephone: +1.203.393.0010

For on-line Distributor information, visit LATICRETE at

www.laticrete.com.

Cost Contact a LATICRETE Distributor in your area.

7. WARRANTY

See 10. FILING SYSTEM

DS 230.13: LATICRETE® Product Warranty (United States

and Canada)

A component of

DS 230.10APD: LATICRETE 10 Year Tile & Stone System

Warranty (United States and Canada)

DS 025.0APD: LATICRETE 25 Year Tile & Stone System

Warranty (United States and Canada)

DS 230.99: LATICRETE Lifetime Tile & Stone System

Warranty (United States and Canada)

8. MAINTENANCE

LATICRETE and LATAPOXY® grouts require routine cleaning with a neutral pH soap and water. All other LATICRETE and LATAPOXY materials require no maintenance but installation performance and durability may depend on properly maintaining products supplied by other manufacturers.

9. TECHNICAL SERVICES

Technical Assistance

Information is available by calling the LATICRETE Technical Service Hotline:

Toll Free: 1.800.243.4788, ext. 235 Telephone: +1.203.393.0010, ext. 235

Fax: +1.203.393.1948

Technical and Safety Literature

To acquire technical and safety literature, please visit our website at www.laticrete.com

10. FILING SYSTEM

DS 230.99:

Additional product information is available on our website at **www.laticrete.com**. The following is a list of related documents:

DS 230.13: LATICRETE Product Warranty (United States

and Canada)

DS 230.10APD: LATICRETE 10 Year Tile & Stone System

Warranty (United States and Canada)

DS 025.0APD: LATICRETE 25 Year Tile & Stone System

Warranty (United States and Canada)


LATICRETE Lifetime Tile & Stone System


Warranty (United States and Canada)

DS 031.0: HYDRO BAN Pre-Sloped Shower Pan

DS 633.0: LATAPOXY 300 Adhesive

DS 663.0: HYDRO BAN DS 677.0: 254 Platinum

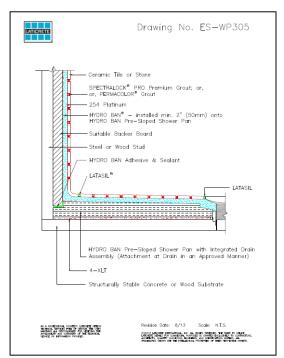

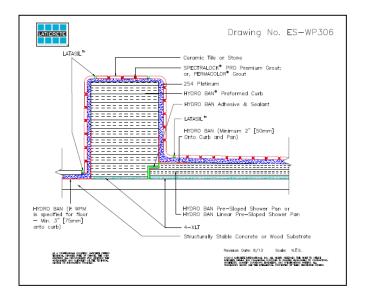

LATICRETE International, Inc.

One LATICRETE Park North, Bethany, CT 06524-3423 USA • 1.800.243.4788 • +1.203.393.0010 • www.laticrete.com

©2014 LATICRETE International, Inc.

All trademarks shown are the intellectual properties of their respective owners